






数显表

S_Dial WORK

描述

BLUETOOTH® SMART IP67

- 内置蓝牙 **Bluetooth® SMART** 数据传输
- 结构坚固
- 防护等级 **IP67**，依据 **IEC 60529** (防水型)，即使在数据连接状态也可实现
- 防水、防切削液
- 全新技术，自定义显示菜单
- 更多功能 (最小/最大/差值,公差, 倍率因子, 预设值, 自动关机, 等等)
- 自动唤醒及自动休眠模式 (**S.I.S system**), 绝对测量系统
- 最大允许误差 **3 μm**



* SIS 在第5页中描述




数显表

S_Dial WORK

图纸尺寸

BLUETOOTH® SMART IP67

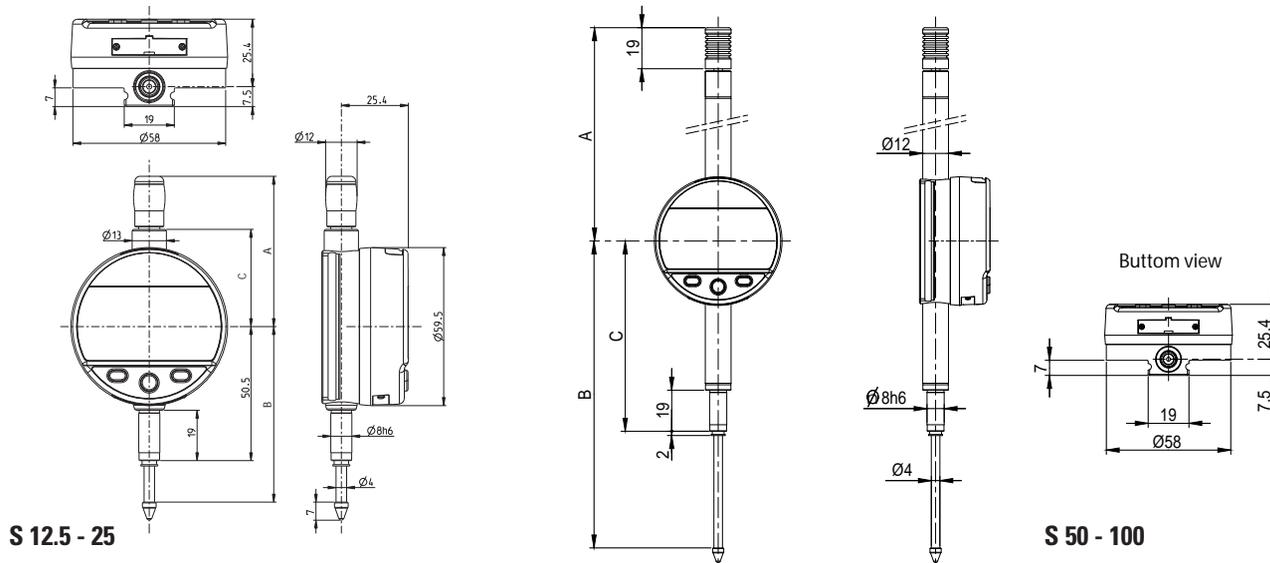

技术参数

		805.6301	805.6501	805.6621	805.6661
测量范围	mm	12.5	25	50	100
分辨率	mm	0.001	0.001	0.001	0.001
最大允许误差	μm	3	4	5	6
重复性	μm	2			
防护类型 ¹⁾		S			
IP67 (IEC 60529)		●			
A	mm	56.6	69.3	121	172
B	mm	66.1	79	142	244
C	mm	36.6	49.4	88	139
接口: Proximity/Power		USB / RS232 / BLUETOOTH® Smart*			
电脑程序设置功参数		●			
出厂设定功能 (可由电脑设定菜单内容)		mm/inch, 基准 I/II, 预设值 (最大 999.999) 最小/最大/差值, 公差模式, 分辨率, 测量方向, 倍率因子, 自动或手动关机, 键盘锁			

¹⁾ S = 标准型

* 100% 与 BLUETOOTH® Smart 接收器 981.7100 匹配
参见第6页有关国家许可证书内容

仪器配置

测力

- 仪器主机
- 内置锂电池CR2032
- 操作手册
- 校准证书 (仅提供千分表)

		12.5	25	50	100
标准测力	N	0.65 - 0.90	0.65 - 1.15	1.25 - 2.7	2.2 - 5.7
低测力 ²⁾	N	0.4 - 0.55	0.45 - 0.9	---	---
高测力 ²⁾	N	1.0 - 1.6	0.9 - 1.8	---	---

± 20%公差, 测杆外伸状态.
²⁾ 定制